




# decente

*pure lines*

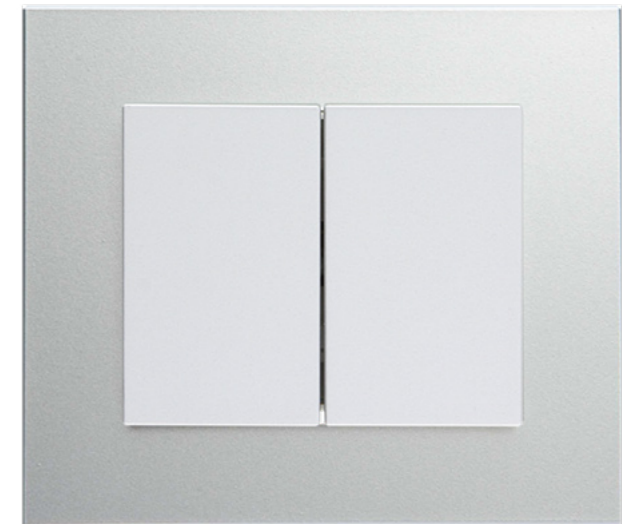

Clean lines, timeless design together with noble natural materials characterize DECENTE series. Wider, luxurious looking glass, wooden, metal or plexi-glass frames brilliantly accompany various modern interior styles. Frames of minimal thickness provide an elegant feel.

Covers are made of high quality, UV-stable plastic.





## timeless design

Various materials of different shades of glass, wood, metal, and plexiglass allow for coordination with the interior according to your preferences.



wooden walnut MDF frame  
/ cover white



wooden mahogany MDF frame  
/ cover titanium




wooden oak MDF frame  
/ cover white



glass milk white frame  
/ cover white



stainless steel frame  
/ cover black matt

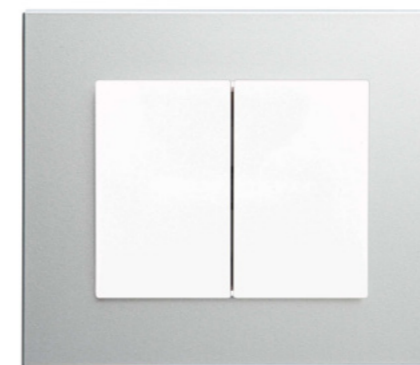


aluminium frame  
/ cover white



plexiglass black frame  
/ cover white





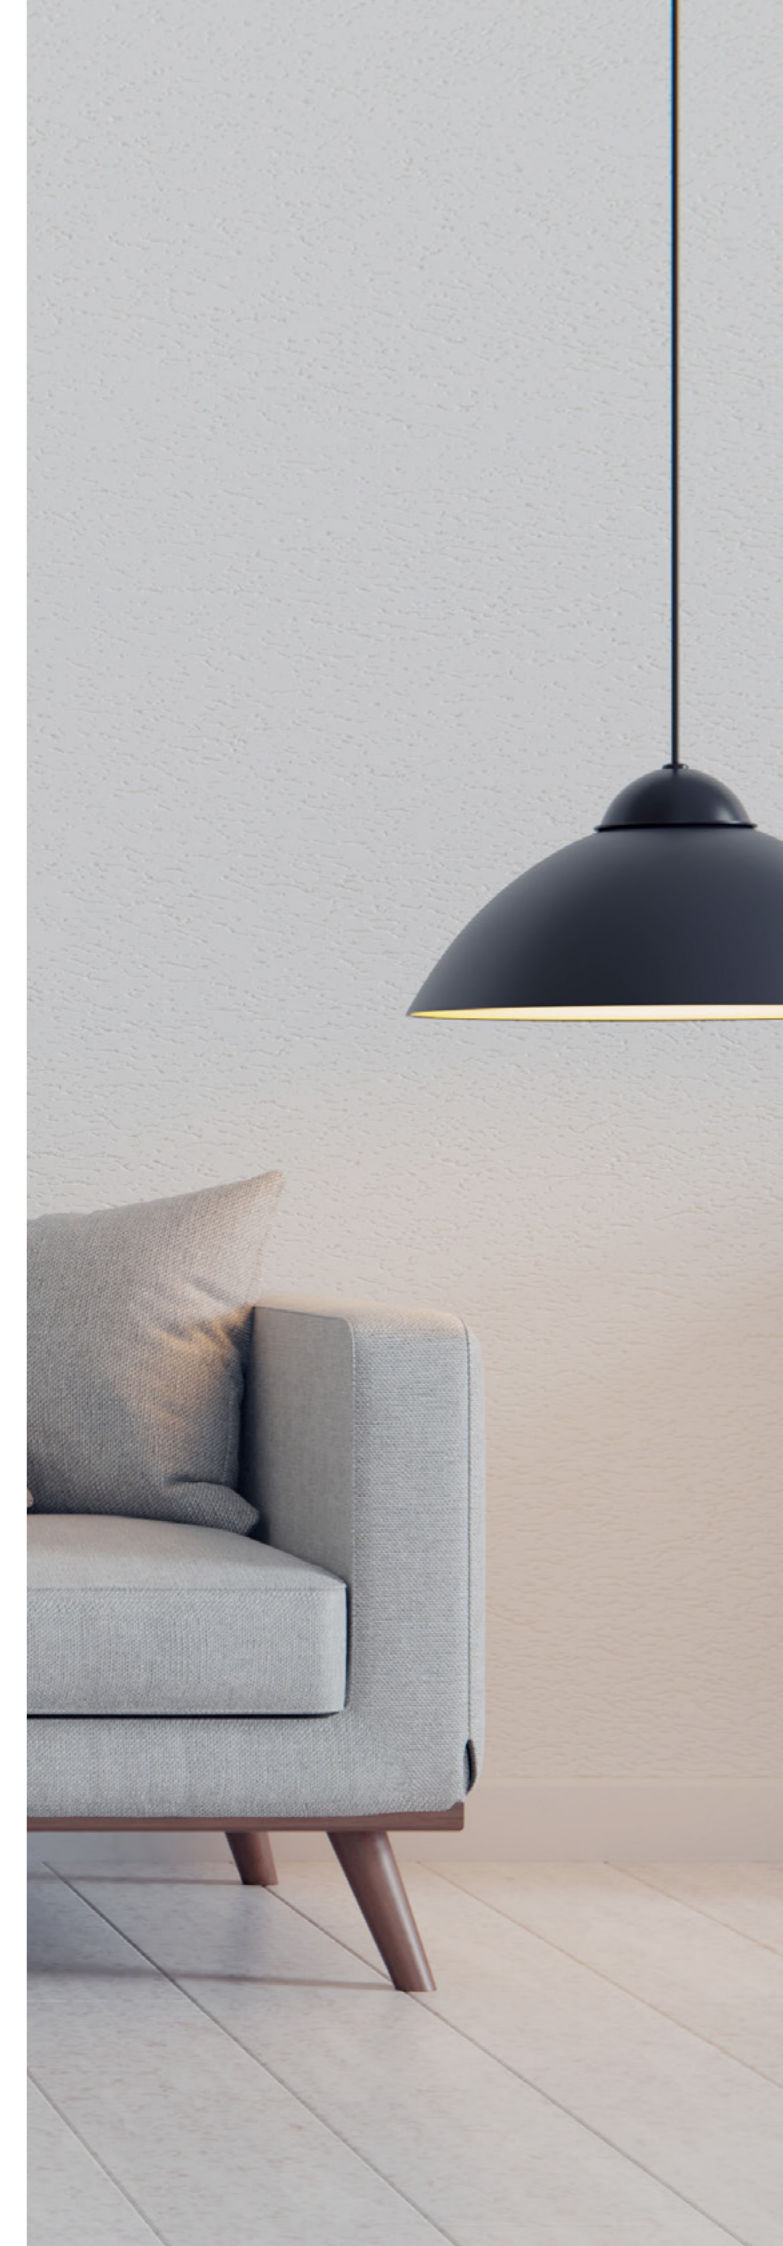





Try our online designer tool  
[www.domovnivypinace.cz/en](http://www.domovnivypinace.cz/en)





## frame multiplicities

	DSD 00-00000- <b>11XX</b>	dimensions (h×w) 95×110 mm
	DSD 00-00000- <b>12XX</b>	dimensions (h×w) 95×181 mm
	DSD 00-00000- <b>13XX</b>	dimensions (h×w) 95×252 mm
	DSD 00-00000- <b>14XX</b>	dimensions (h×w) 95×323 mm
	DSD 00-00000- <b>21XX</b>	dimensions (h×w) 166×110 mm
	DSD 00-00000- <b>31XX</b>	dimensions (h×w) 237×110 mm
	DSD 00-00000- <b>41XX</b>	dimensions (h×w) 308×110 mm
	DSD 00-00000- <b>82XX</b>	dimensions (h×w) 130×110 mm































**i** Please note that horizontal and vertical multiple frames have different design.



glass triple frame dove grey / graphite covers


## sets

				
switch arrangement (arrangement 1, 1N, 2, 6, 7, 1/0, 1/0N), press button up to 24V	switch arrangement (arrangement 5, 1+1/0, 1/0+1/0, 6+6), press button up to 24V	switch with backlighting (arrangement 1S, 2S, 1N, 1/0N, 1/0)	rotary cooker switch three-pole 16 A	rotary shutter controller two-pole (arrangement 1/0+1/0 with locking)
				
shutter controller, rocker switch (arrangement 1/0+1/0, 6/0+6/0 with simultaneous operation electric lock)	rotary dimmer with arr. function 6, also LED rotary dimmer	AUDIO-VIDEO outlet (stereo)	aerial outlet (TV+R+SAT) terminal 1 dB (ZAR-SAT 1,4/K) through 10 dB (ZAR-SAT 10/P3)	aerial outlet (TV+SAT+SAT) through 10 dB (ZAR-SAT 10/P3)
				
single outlet with safety shutters (2P+PE)	single outlet with safety shutters and overvoltage protection (2P+PE) LIGHT INDICATION	single outlet with safety shutters and overvoltage protection (2P+PE) AUDIBLE ALARM	schuko single outlet with safety shutters (2P+PE)	schuko single outlet with safety shutters and overvoltage protection (2P+PE) LIGHT INDICATION
				
double outlet with safety shutters 2x (2P+PE)	double outlet with safety shutters and overvoltage protection 2x (2P+PE) LIGHT INDICATION	single outlet with safety shutters and a IP20 covering lid (2P+PE)	double communication outlet (RJ 45 - 8 Cat. 5E) (RJ 45 - 8 Cat. 6) (RJ 45 Cat. 6 shielded) (RJ 45 Cat. 6A shielded)	double telephone outlet (TZ-1A/2A) with loop checking (TZU-1A/2A)
				
OREG/EBERLE 2T/3T analog thermostat ROOM/FLOOR under-plaster	EBERLE DSD 4T digital thermostat UNIVERSAL (application as floor and corn-bined, it is necessary to buy a sensor) under-plaster	B.E.G. motion sensor	HDMI+PC outlet 2 connectors, HDMI female + PC outlet Cat. 5E / RJ 45-8 for UTP cable	USB+PC outlet 2 connectors, USB 3.0 female + PC outlet Cat. 5E / RJ 45-8 for UTP cable
				
USB-A outlet with charger + HDMI 2 connectors, USB 3.0 female + HDMI female	2x USB-A outlet with charger 2 connectors USB 3.0 female	2x USB-C outlet with charger 2,1 A, 10,5 W		

**i** Connectors for keystone outlets can also be supplied in black color.

## frames

### glass

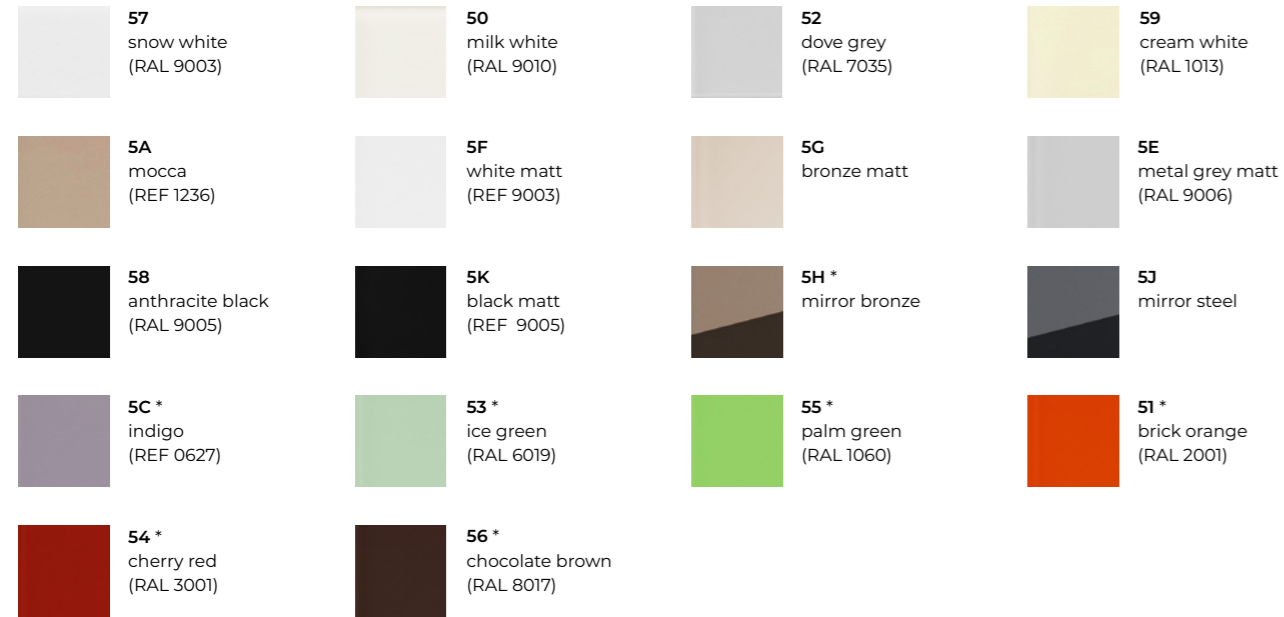

### wood \*\*




### metal




### plexi




### plexiglass



## covers

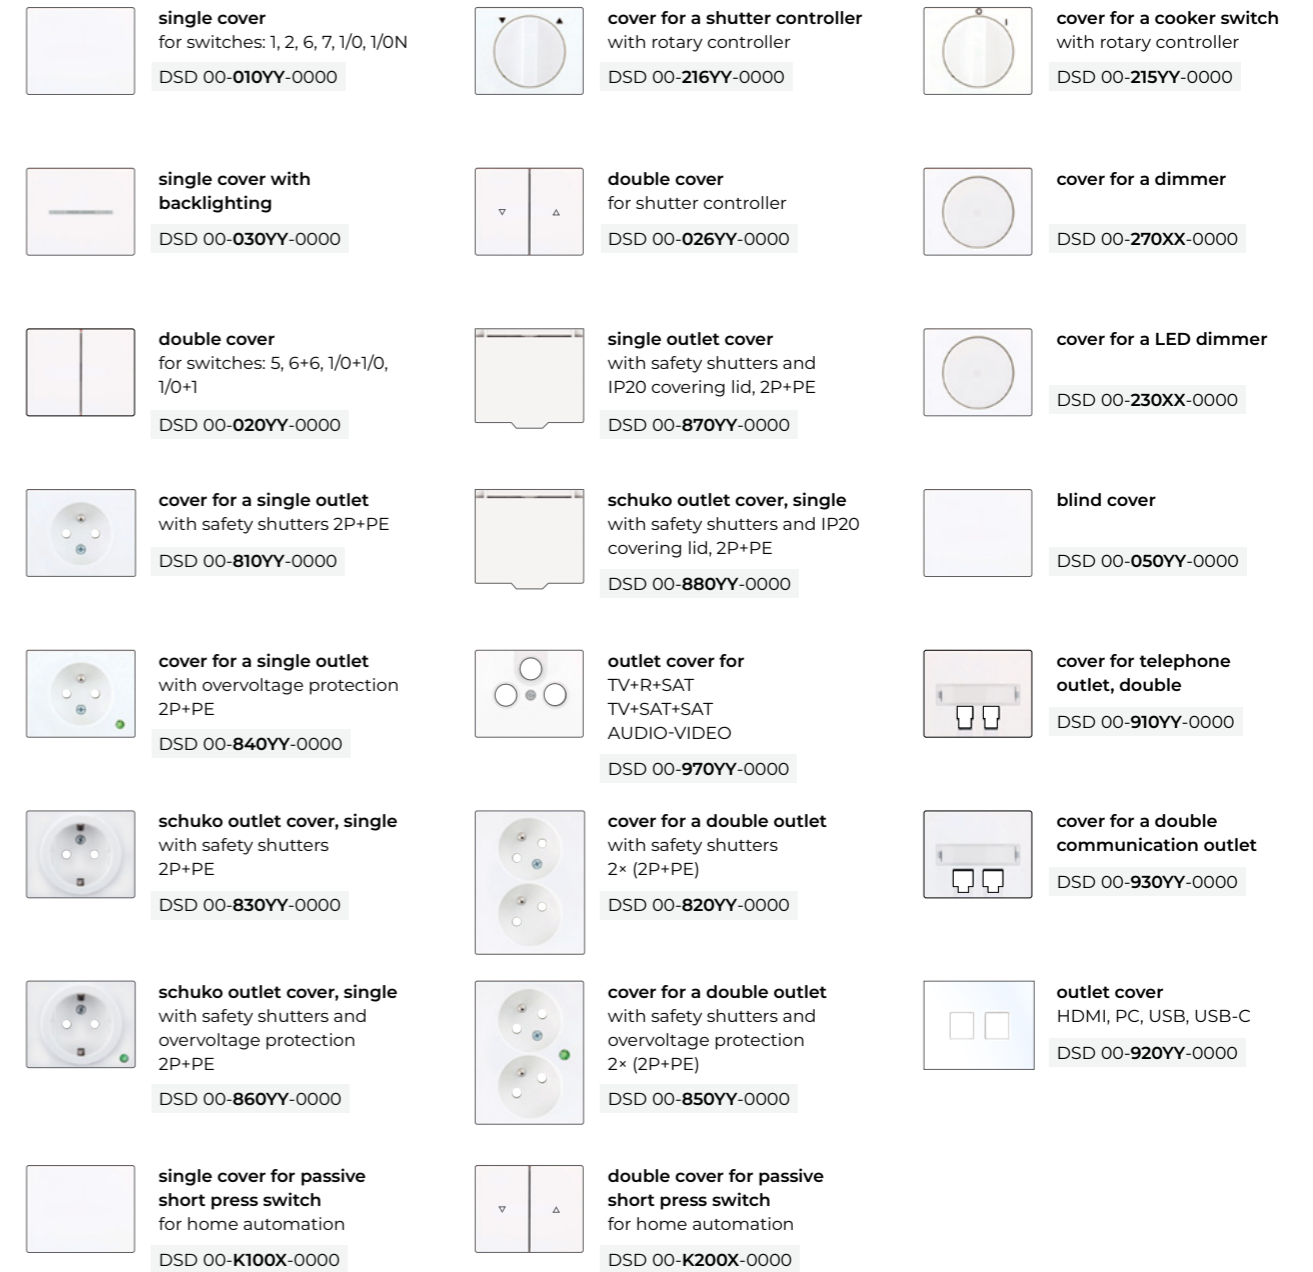

## cover colours

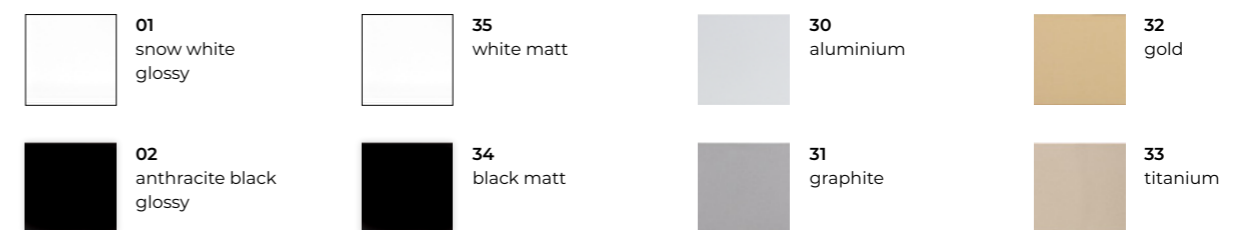

\* Until stocks are sold out  
\*\* Please note that due to uniqueness of natural wooden materials used for DECENTE frames, these may not always be the same, their colour tone and pattern may vary. Colour tones may differ slightly from reality.



ORDER CODE:  
DSD 00-00000-XXXX



ORDER CODE:  
DSD 00-000YY-0000

## fittings

 **fitting, arrangement 1**  
singlepole switch  
10 AX, 250 V AC  
**DSD 01-00000-0000**

 **fitting, arrangement 1N**  
singlepole switch with a zero terminal  
10 AX, 250 V AC  
**DSD 12-00000-0000**

 **fitting, arrangement 2**  
twopole switch  
10 AX, 250 V AC  
**DSD 02-00000-0000**

 **fitting, arrangement 5**  
serial change-over switch  
10 AX, 250 V AC  
**DSD 05-00000-0000**

 **fitting, arrangement 6**  
ac change-over switch  
10 AX, 250 V AC  
**DSD 06-00000-0000**

 **fitting, arrangement 6+6 (6+1)**  
ac change-over switch,  
double 10 AX, 250 V AC  
**DSD 66-00000-0000**

 **fitting, arrangement 7**  
crossbar switch  
10 AX, 250 V AC  
**DSD 07-00000-0000**

 **fitting, arrangement 1/0**  
switching controller  
10 AX, 250 V AC  
**DSD 10-00000-0000**

 **fitting, arrangement 1/0+1/0**  
switching controller, double  
10 AX, 250 V AC  
also suitable as shutter switch without locking  
**DSD 11-00000-0000**

 **fitting, arrangement 1/0N**  
switching controller with a zero terminal  
10 AX, 250 V AC  
**DSD 13-00000-0000**

 **fitting, arrangement 1/0+1**  
switching controller  
+ singlepole switch  
10 AX, 250 V AC  
**DSD 14-00000-0000**

 **fitting, arrangement 6/0+6/0**  
shutter switch with locking  
10 AX, 250 V AC  
**DSD 16-00000-0000**

**fitting, arrangement 1+1**  
singlepole switch  
+ singlepole switch  
10 AX, 250 V AC  
**DSD 15-00000-0000**

 **fitting, arrangement 1/0,  
press button, up to 24 V**  
50 mA, 24 V DC  
**DSD 17-00000-0000**

 **fitting, arrangement 1/0 + 1/0,  
press button, up to 24 V**  
50 mA, 24 V DC  
**DSD 18-00000-0000**

 **passive short-press switch**  
switch for intelligent systems  
50 mA, 12 V DC  
**DSD KC-00000-0000**

 **passive short press switch**  
for intelligent systems  
with KNX module  
21-30 V DC  
**DSD KX-00000-0000**

 **AUDIO-VIDEO outlet**  
stereo (2+1)  
**DSD 72-00000-0000**

 **fitting for cooker switch, rotary**  
threepole  
16 A, 400 V AC  
recommended min. depth of installation box - 60 mm  
**DSD 21-00000-0000**

 **fitting for shutter controller**  
rotary (with locking)  
10 A, 230 V AC  
recommended min. depth of installation box - 60 mm  
**DSD 22-00000-0000**

 **dimmer fitting with  
arrangement 6**  
230 V AC, load  
40-250 W  
**DSD 27-00000-0000**

 **LED dimmer fitting**  
230 V AC, load 0-100 W LED,  
10-250 W incandescent  
light bulb  
**DSD 23-00000-0000**


 **telephone outlet**  
double  
TZ-1A2A, TZU  
**DSD 91-00000-0000**


 **communication outlet Cat. 5E / Cat. 6**  
double PC outlet, black connectors  
2x RJ 45-8 for UTP cable  
**DSD 93-00000-0000** Cat. 5  
**DSD 98-00000-0000** Cat. 6


 **communication outlet Cat. 6 / Cat. 6A**  
double PC outlet, black connectors  
2x RJ 45 shielded for STP cable  
**DSD 74-00000-0000** Cat. 6  
**DSD 75-00000-0000** Cat. 6A


 **HDMI+PC socket**  
2 connectors: HDMI female  
+ PC outlet Cat. 5E for utp cable  
**DSD 92-00000-0000**


 **USB-A+PC socket**  
2 connectors: USB 3.0 female  
+ PC outlet Cat. 5E for utp cable  
**DSD 94-00000-0000**


 **USB-A outlet with charger + HDMI**  
2 connectors: USB 3.0 female  
+ HDMI female, white connectors  
(1000 mA)  
**DSD 95-00000-0000**


 **2x USB-A outlet with charger**  
2 connectors: USB 3.0 female  
2 connectors, 5 V DC / 1000 mA  
**DSD 96-00000-0000**


 **2x USB-C outlet with charger**  
2 connectors: USB-C charger  
2,1 A, 10,5 W  
**DSD 9C-00000-0000**


 **outlet TV+R+SAT**  
terminal, attenuation 1 dB, 300 mA, 24 V DC  
for coaxial cables of diameter 4.5-8.3 mm  
type designation on the product: ZAR-SAT 1.4/K  
**DSD 97-00000-0000**


 **outlet TV+R+SAT**  
through, attenuation 10 dB, 300 mA, 24 V DC  
for coaxial cables of diameter 4.5-8.3 mm  
type designation on the product: ZAR-SAT 10/P3  
**DSD 99-00000-0000**

 **outlet TV+SAT+SAT**  
through, attenuation 10 dB, 300 mA, 24 V DC  
for coaxial cables of diameter 4.5-8.3 mm  
type designation on the product: ZAR-SAT 10/P3  
**DSD 76-00000-0000**


 **outlet 2P+PE**  
single socket with safety shutters and IP 20  
covering lid, plastic base 16 A, 250 V AC  
**DSD 89-870YY-0000**

 **outlet schuko 2P+PE**  
single socket with safety shutters and IP 20  
covering lid, plastic base 16 A, 250 V AC  
**DSD S2-880YY-0000**


 **2P+PE outlet**  
single, with safety shutters, plastic base  
16 A, 250 V AC  
**DSD 89-810YY-0000**


 **2P+PE with OP outlet**  
single, with safety shutters and overvoltage  
protection (LIGHT INDICATION)  
16 A, 250 V AC  
**DSD 84-840YY-0000**

 **2P+PE with OP outlet**  
single, with safety shutters and overvoltage  
protection (AUDIBLE ALARM)  
16 A, 250 V AC  
**DSD 80-810YY-0000**









 **2P+PE schuko outlet**  
single, with safety shutters  
16 A, 250 V AC  
**DSD S2-830YY-0000**


 **2P+PE with OP schuko outlet**  
single, with safety shutters and overvoltage  
protection (LIGHT INDICATION)  
16 A, 250 V AC  
**DSD S3-860YY-0000**

 **2x (2P+PE) outlet**  
double, with safety shutters  
16 A, 250 V AC  
**DSD 82-820YY-0000**

 **2x (2P+PE) OP outlet**  
double, with safety shutters and with  
overvoltage protection (LIGHT INDICATION)  
16 A, 250 V AC I max 4.5 kA, Up < 1.2 kV  
**DSD 85-850YY-0000**

## outlet cover colours

	<b>01</b> snow white glossy		<b>35</b> white matt		<b>30</b> aluminium		<b>32</b> gold
	<b>02</b> anthracite black glossy		<b>34</b> black matt		<b>31</b> graphite		<b>33</b> titanium

 Power outlets always come in set with a cover of your choice.  
Optional USB-A charger + USB-C charger connector socket.



## accessories



**PC connector Cat. 5E**  
RJ 45 black plastic  
set of 2 pcs  
for UTP cable

**DSE 33-00000-000000**



**PC connector Cat. 6**  
RJ 45 black plastic  
set of 2 pcs  
for UTP cable

**DSE 34-00000-000000**



**PC connector Cat. 6 shielded**  
RJ 45 Cat. 6  
set of 2 pcs  
for STP cable

**DSE 24-00000-000000**



**PC connector Cat. 6A shielded**  
RJ 45 Cat. 6A  
set of 2 pcs  
for STP cable

**DSE 25-00000-000000**



**spacer VK1**  
fills up the gap between installation  
box and fitting

**DSE 29-00000-000000**



**spacer VK2**  
fills up the gap between installation  
box and fitting

**DSE 30-00000-000000**



**connector CINCH AUDIO-VIDEO**  
mono  
set of 2 pcs

**DSE 38-00000-000000**



**connector CINCH AUDIO-VIDEO**  
stereo  
set of 3 pcs

**DSE 39-00000-000000**



**glow lamp**  
230 V, 2 MA

**DSE 3A-00000-000000** orange

230 V, 0,5 MA


**DSE 3B-00000-000000** green

**DSE 3C-00000-000000** blue




**fixative spurs (claws)**  
set of 2 pcs

**DSE 37-00000-000000**



**support frame for PC connectors**  
for DECENTE and ELEGANT line

**DSE 35-00000-000000**



**support frame for HDMI and USB connectors**  
for DECENTE line

**DSD 35-00000-0000**



**HDMI-A keystone**  
female-female, 4K, 60 Hz, 1 pc

**3453685** black

**3453686** white



**USB-A keystone-charger**  
2.1 A, 10,5 W, 1 pc

**3450546** black

**3453672** white



**USB-C keystone-charger**  
2.1 A, 10,5 W, 1 pc

**3453678** black

**3453679** white





# decente

hotel systems

*comfortable for guests, simple  
and effective for staff*


ACS-line Reception Hotel System by Estelar Company is designed to secure all activities related to running a hotel or pension. The system includes wall-mounted card readers and energy savers in Decente design available in all standard colours and materials which can match other switches and outlets in Decente design. One hotel card will allow room access, lift control, access to authorized areas (parking, wellness, etc.), payments in hotel bars and restaurants, use of other services (bike rental, ski passes, etc.).



**ESTELAR**  
ELEKTRONICKE SYSTÉMY

## card reader

Card reader (built-in card scanner) is a device for reading cards and controlling individual access according to permission. Typical use is e.g. opening of hotel entrance door, hotel room access, opening of wellness door within allowed time.

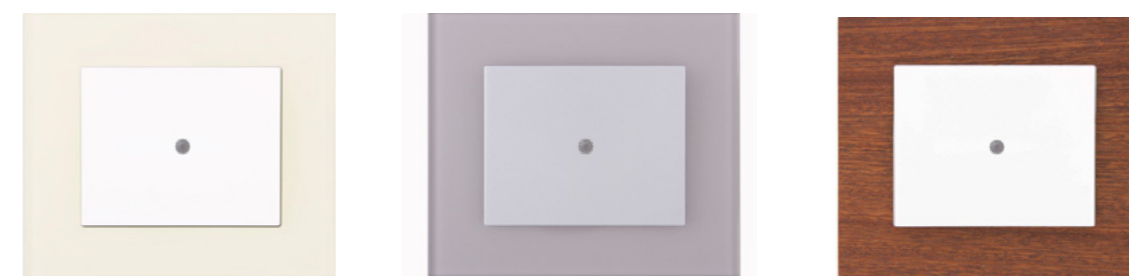

ORDER CODE:  
DSD 00-CK0YY-H1XX

## energy saver

Energy Saver is a device that allows to insert a card and thereby invoke an action that lasts while the card is inserted. The device is equipped with a card reader and responds only to authorized cards, so it is not possible to replace the card with for example sturdy paper. Typical use is in a hotel room where the wiring is active only in the presence of a guest or for light control in the meeting room according to its occupancy. Connection of heating sensors for controlling room temperature is also available.



The producer of hotel card readers and hotel systems is ESTELAR, s. r. o.  
More info to be found at [www.acsline.cz](http://www.acsline.cz).



Card readers are offered in DECENTE design with white, black or metallic cover.  
Frame can be chosen from glass, wood, metal, plexi or plexiglass collection.



ORDER CODE:  
DSD 00-HK0YY-H1XX



# decente

smart home solution



## smart home solution

The so-called smart house or home automation provide not only high living comfort, save energy costs, increase safety and entertainment at your fingertips.

Smart home can be controlled by:

- wall mounted short press switches - which you can choose from our timeless DECENTE design
- touch panels
- devices running on iOS or Android systems (computers, smartphones,...)
- TV
- LAN
- sensors and other controllers connected to main central-control unit



compatible smart systems



LOXONE